






CAPACITÀ FORATURA DRILLING CAPACITY

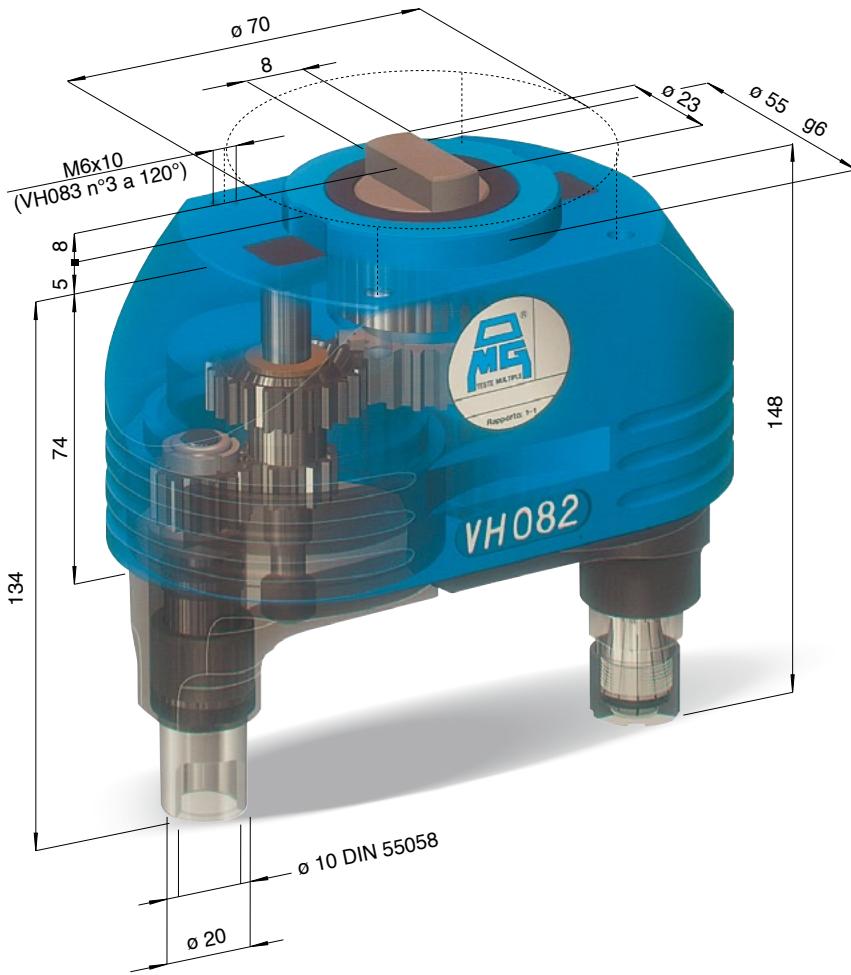

TESTA MODELLO HEAD TYPE	VH 082	VH 083 L	VH 083	VH 084
ARTICOLO ITEM	VH 082 P	VH 083 LP	VH 083 P	VH 84 P
ATTACCO UTENSILE SPINDLE TYPE	ER 16 - max ø 10			
ARTICOLO ITEM	VH 082 D	VH 083 LD	VH 083 D	VH 84 D
ATTACCO UTENSILE SPINDLE TYPE	DIN55058 - ø 10			
N. MANDRINI SPINDLES NR.	2	3	3	4
CAMPO DI LAVORO MIN. CENTRE DISTANCES MIN.	24	24 + 24	ø 36	ø 53,5
CAMPO DI LAVORO MAX. CENTRE DISTANCES MAX.	108	66 + 66	ø 120	ø 137,5
CAPACITÀ FORATURA DRILLING CAPACITY	ACCIAIO/STILL Rm 500 N/mm ² - ø 8 GHISA/CAST IRON GG25 - ø 10			
MASCHIATURA TAPPING	M 6			
RAPPORTO RATIO	1 - 1			
VELOCITÀ RPM	4.000			
PESO WEIGHT	2,2 kg	2,9 kg	3,4 kg	4,6 kg